

## SPIR STAR 单向阀

单向阀可防止逆流和对压力系统的潜在损坏。


软阀座由 PEEK 和金属制作可以快速关闭以及达到最佳性能。

金属阀座适用于高温或高频工况应用。




- 螺纹类型**.....高压、中压和 NPT
- 最高工作压力**.....1,0350 bar | 150,000 psi
- 材料**.....316 不锈钢阀体
- 工作温度 (软密封)** .....-46°C to +204°C | -50° F to 400° F
- 工作温度 (软密封)** .....-80°C to +260°C | -110° F to 500° F

模型及参数图如下:

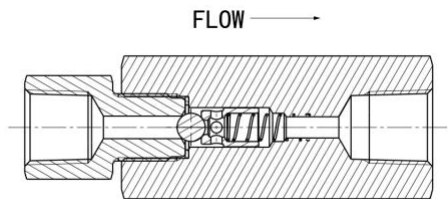


NPT 球型单向阀					
型号	压力	接口	A-B	长度	六角螺母
CV-NF2-BS-15K	15,000	1/8"FNPT	NF2	4-5/32"	1"
CV-NF4-BS-15K	15,000	1/4"FNPT	NF4	4-5/32"	1"
CV-NF6-BS-15K	15,000	3/8"FNPT	NF6	4-5/32"	1"
CV-NF8-BS-15K	15,000	1/2"FNPT	NF8	4-9/16"	1-3/8"
CV-NF12-BS-10K	10,000	3/4"FNPT	NF12	5-5/16"	1-3/8"
CV-NF16-BS-10K	10,000	1"FNPT	NF16	7-1/8"	2-1/2"

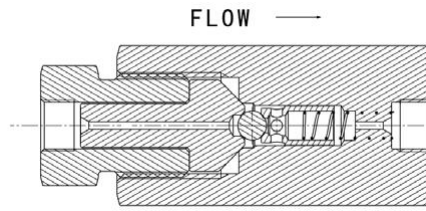


中压球型单向阀

型号	连接尺寸	压力	接口	A-B	长度	六角螺母
CV-MF4-BS-20K	1/4"O.D.	20,000	MF4	1/8"	3-25/32"	1"
CV-MF6-BS-20K	3/8"O.D.	20,000	MF6	7/32"	3-47/64	1"
CV-MF9-BS-20K	9/16"O.D.	20,000	MF9	9/32"	4-31/64"	1-3/8"
CV-MF12-BS-20K	3/4"O.D.	20,000	MF12	5/16"	5-1/8"	1-13/16"
CV-MF16-BS-20K	1"O.D.	20,000	MF16	7/16"	6-15/32"	2-33/64"

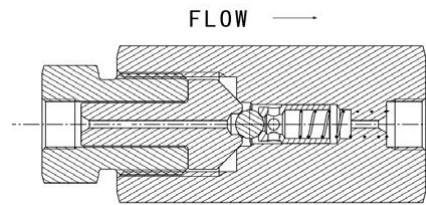


高压球型单向阀

型号	压力	接口	长度	六角螺母
CV-HF9-BS-40K	40,000	HF9	5-1/8"	1-1/2"
CV-HF2-BS-60K	60,000	HF2	4-3/16"	1-1/2"
CV-HF4-BS-60K	60,000	HF4	4-9/16"	1-1/2"
CV-HF6-BS-60K	60,000	HF6	4-5/8"	1-1/2"
CV-HF9-BS-60K	60,000	HF9	5-1/8"	1-1/2"
CV-HF16-BS-30K	30,000	HF16	6-1/2"	2-1/2"RD with flats

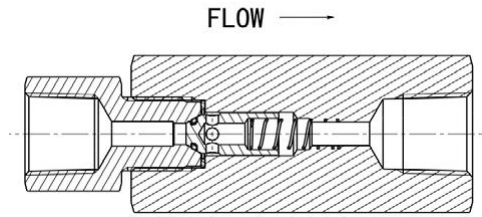


NPT 软密封单向阀

型号	压力	接口	A-B	长度	六角螺母
CV-NF2-SS-15K	15,000	1/8"FNPT	NF2	4-5/32"	1"
CV-NF4-SS-15K	15,000	1/4"FNPT	NF4	4-5/32"	1"
CV-NF6-SS-15K	15,000	3/8"FNPT	NF6	4-7/64"	1"
CV-NF8-SS-5K	15,000	1/2"FNPT	NF8	4-9/16"	1-3/8"
CV-NF12-SS-10K	10,000	3/4"FNPT	NF12	5-5/16"	1-49/64"
CV-NF16-SS-10K	10,000	1"FNPT	NF16	7-1/8"	2-1/2"

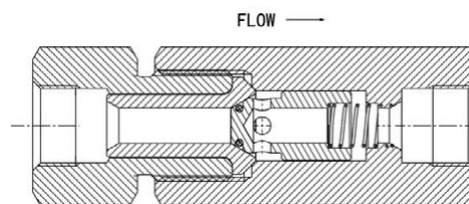

中压软密封单向阀

型号	连接尺寸	压力	接口	A-B	长度	六角螺母
CV-MF4-SS-20K	1/4"O.D.	20,000	MF4	1/8"	3-25/32"	1"
CV-MF6-SS-20K	3/8"O.D.	20,000	MF6	7/32"	3-25/32"	1"
CV-MF9-SS-20K	9/16"O.D.	20,000	MF9	23/64"	4-1/2"	1-3/8"
CV-MF12-5S-20K	3/4"O.D.	20,000	MF12	25/64"	5-1/8"	1-13/16"
CV-MF16-SS-20K	1"O.D.	20,000	MF16	7/16"	6-31/64"	2-33/64"

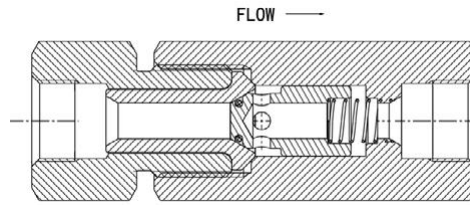

高压软密封单向阀

型号	压力	接口	长度	六角螺母
CV-HF9-SS-40K	40,000	HF9	5-1/8"	1-1/2"
CV-HF2-SS-60K	60,000	HF2	4-3/16"	1-1/2"
CV-HF4-SS-60K	60,000	HF4	4-19/32"	1-1/2"
CV-HF6-SS-60K	60,000	HF6	4-21/32"	1-1/2"
CV-HF9-SS-60K	60,000	HF9	5-1/8"	1-1/2"
CV-HF16-5S-30K	30,000	HF16	6-1/2"	2-1/2"RD with flats